


T-SERIES YARD BOSS

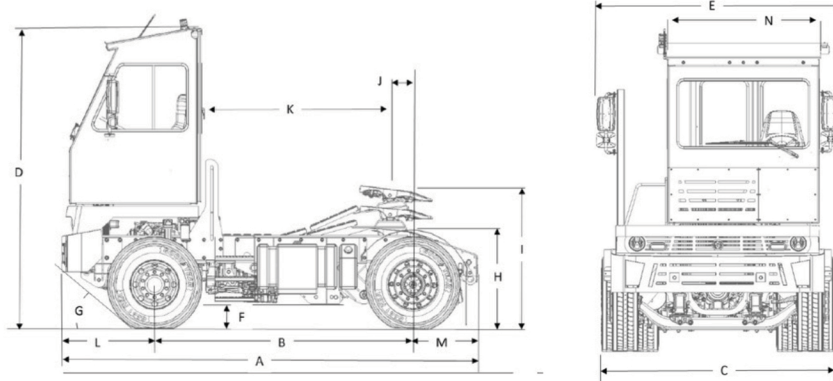

POWERTRAIN

	Standard	Optional
Engine	Cummins QSB T4F 6.7L 173 HP	ISB 6.7L 200 HP {DOT}
Transmission	Allison RD 3500	
Gears	1-2-3-4-5-6	
Fuel Tank	50 Gallons	

CHASSIS

	Standard	Optional
Front Axle	Hendrickson STEERTEK NXT 14,600 LB	
Suspension	RIGID - Leaf Springs with Rubber Bushings	
Brake	16.5 x 5 s-cam	
Steering	TRW - TAS66 {DOT}	
Rear Axle	PRC785 Axletech (30,000 LB) 10.5:1 Ratio	
Brake	16.5 x 7 s-cam	
Fifth Wheel	SF Holland FW35 - 70,000 lbs	
Front Tires	11R22.5 Radials	
Rear Tires	11R22.5 Radials	
Wheel	22.5 Steel Hub Piloted	

CAB & TRIM

	Standard	Optional
Structure	Steel, Structural Tube	
Isolation	5 point, fulcrum-focused mounting	
Tilt	Accumulated Gas Shock	
Entry	Rear Sliding Door, 24" x 72"	
Mirrors	Dual West Coast	Powered/Heated/Convex
HVAC	45,000 BTU W/ AC	
Insulation	Thermal and Noise	
Seat	Sears, Atlas II, air suspended	See Dealer
Fenders	Rear Fenders w/ Mud flaps	

HYDRAULIC

	Standard
Flow	31 GPM @ 2300 RPM
Tank	12 Gallon

STATIC DIMENSIONS

		{IN}
A	Overall Length	186
B	WheelBase	116
C	Clearance Width	99
D	Overall Height	134
E	Overall Width	115
F	Ground Clearance	12
G	Approach Angle	40°
H	Fifth Wheel Height Low Position	44
I	Fifth Wheel Height Upper Position	62
J	Fifth Wheel to center line of rear axle	10
K	Trailer Clearance	80
L	Front Tire to Front Bumper	42
M	Rear Tire to Rear Bumper	28
N	Cab Width	65

ELECTRICAL

	Standard	Optional
System	12V	
Alternator	130 Amp	
Battery	2 x 950 CCA	
Headlights	LED	
Stop/Turn/Tail	LED	
Warning/Hazards	LED	
Work lamps	LED	
Beacon	LED	

AIR

	Standard
Compressor	Wabco 18.7 CFM
Tank	4100in ³